


NAVTEX Receiver for GMDSS NCR-333

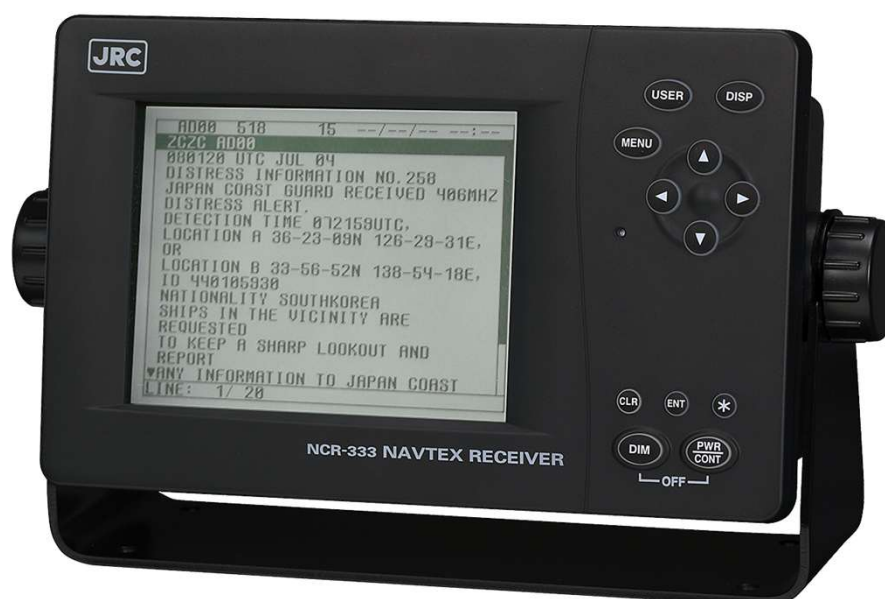

Simultaneously receives navigational warnings, weather alerts, SAR information, and other broadcasts transmitted on three different frequencies.

Users can select preferred stations and message types through programmable settings for tailored reception.

Specifications / Components

| | |
|-----------------------------------|--|
| Receiving frequency | 490kHz, 518kHz, 4209.5kHz |
| Receiving mode | F1B NAVTEX broadcast |
| Sensitivity | CER better than 1×10^{-2} at 1 μ V / input to 50 Ω antenna |
| Frequency stability | +/-15Hz |
| Display | 5.7-inch Black & White LCD |
| Received message storage function | Each Channels : 200 messages / Storage length : 70hours |
| Interface for external units | Serial Interface : 2ports (For Printer and Integrated Navigation System) |
| Power supply | 12V - 24V DC |

Discover the full capabilities online: <https://www.jrc.co.jp/en/product/ncr333>



Japan Radio Co., Ltd.

Japan Radio Co., Ltd.

NAKANO CENTRAL PARK EAST, 10-1, Nakano 4-chome,
Nakano-ku, Tokyo 164-8570, Japan

Phone : +81-3-6832-1721 WEB: <https://www.jrc.co.jp/en/>

INQUIRY

